

FIG. 1

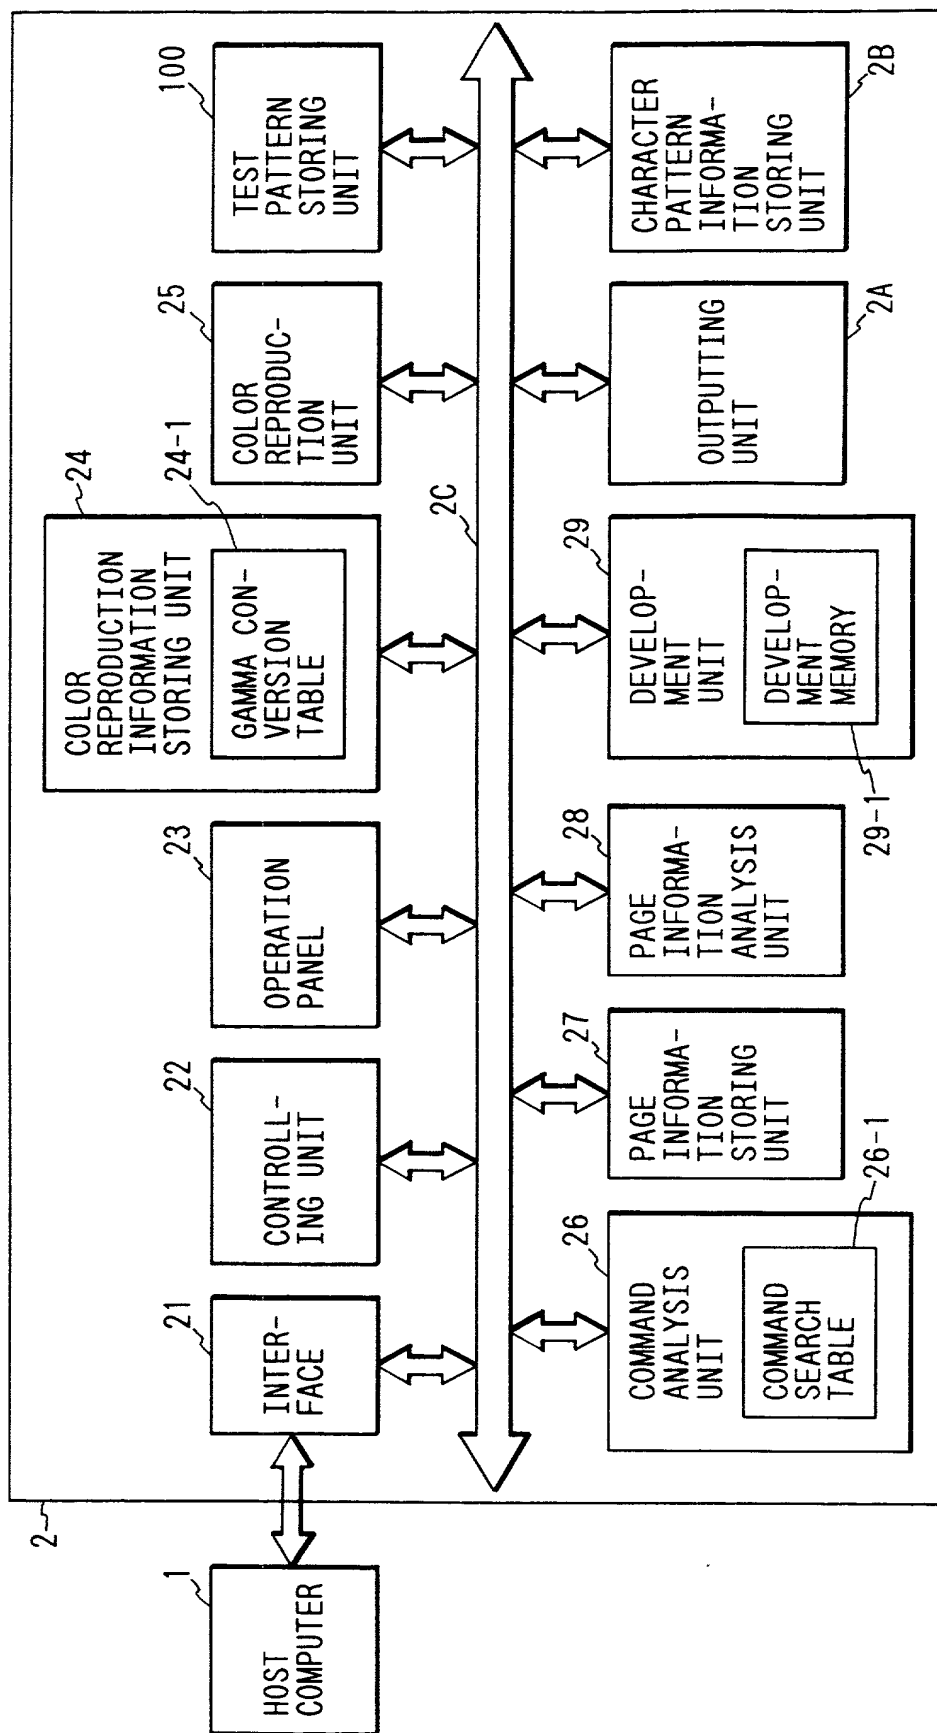


FIG. 2

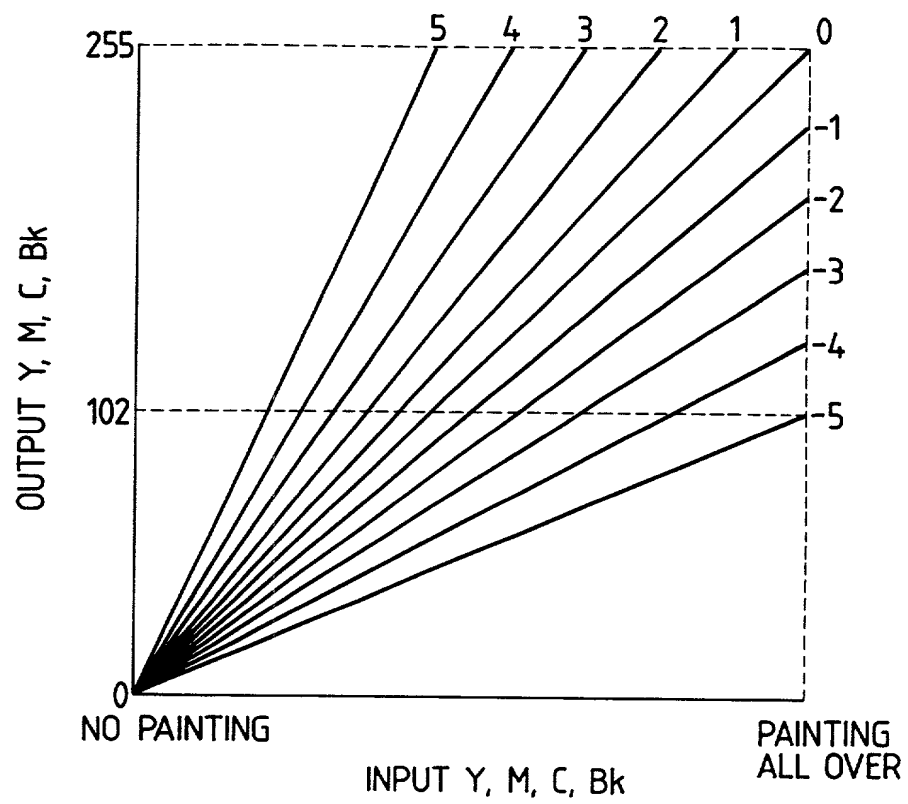


FIG. 3

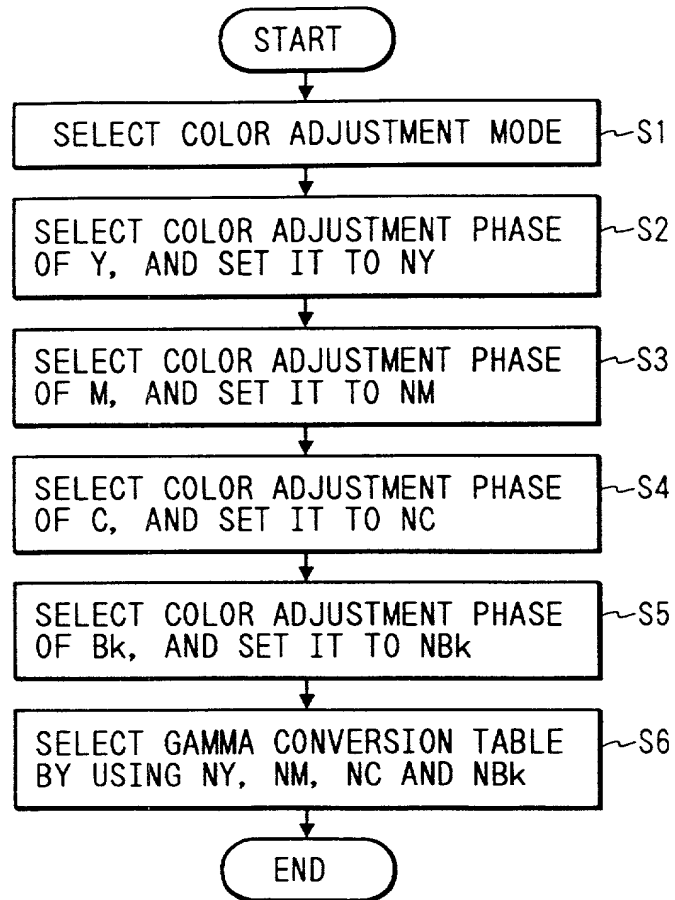


FIG. 4

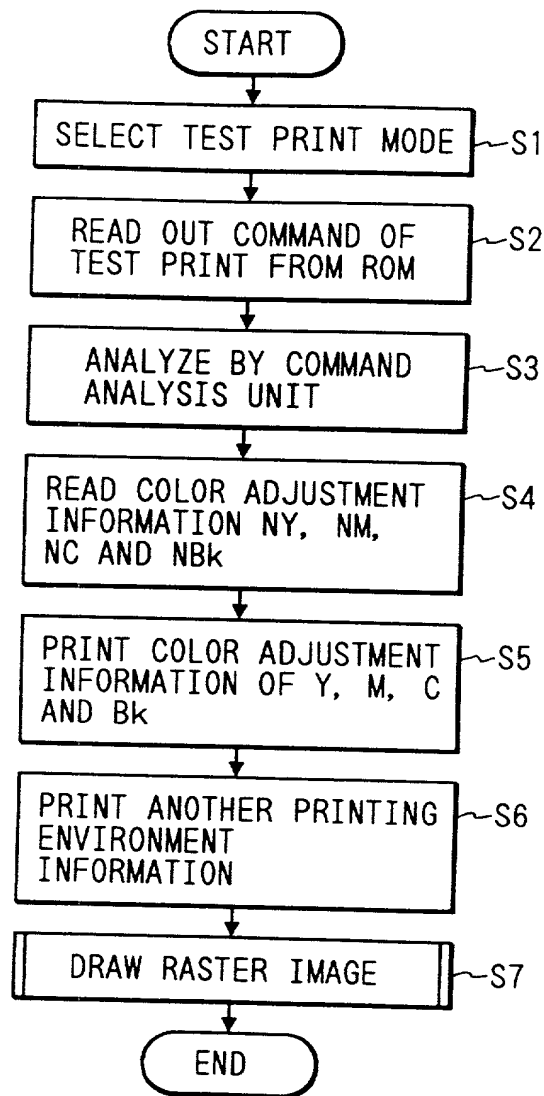


FIG. 5

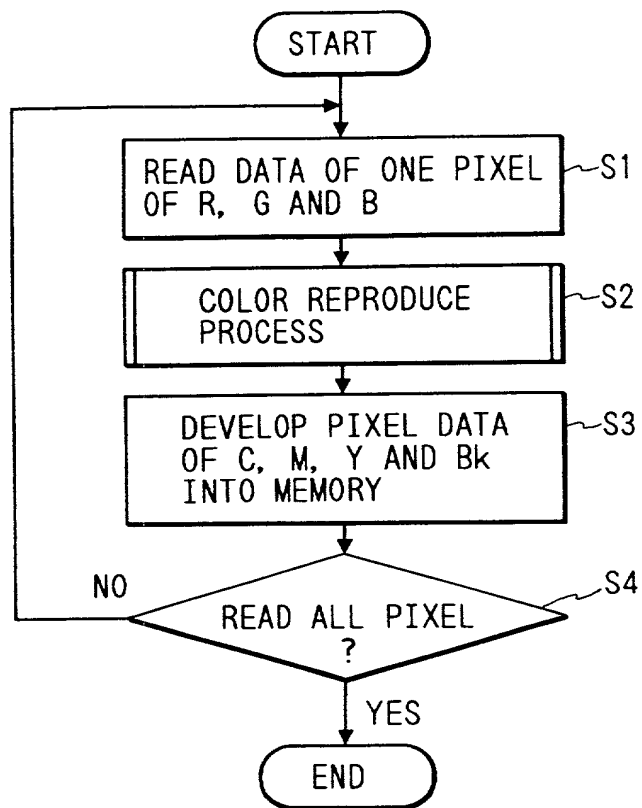


FIG. 6

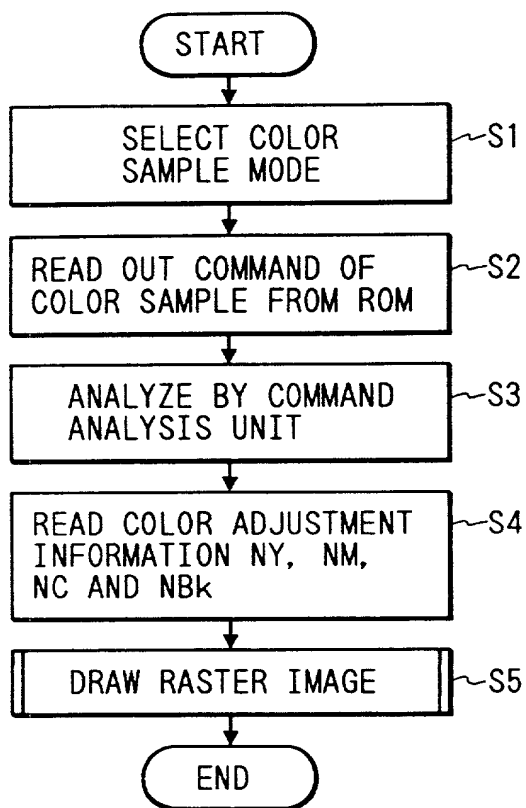


FIG. 7

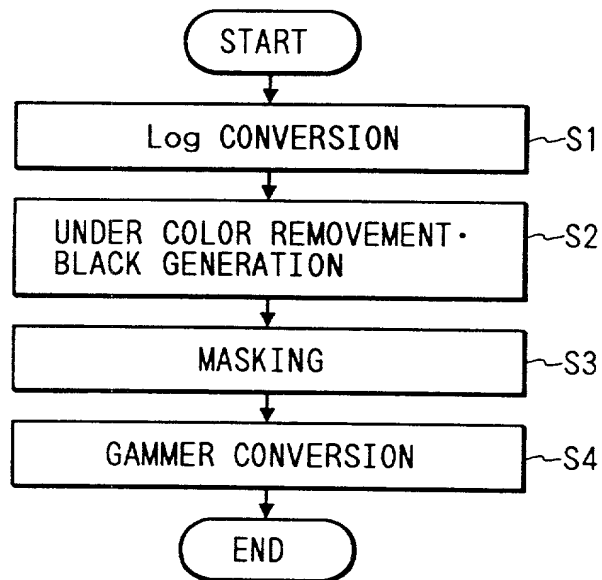


FIG. 8


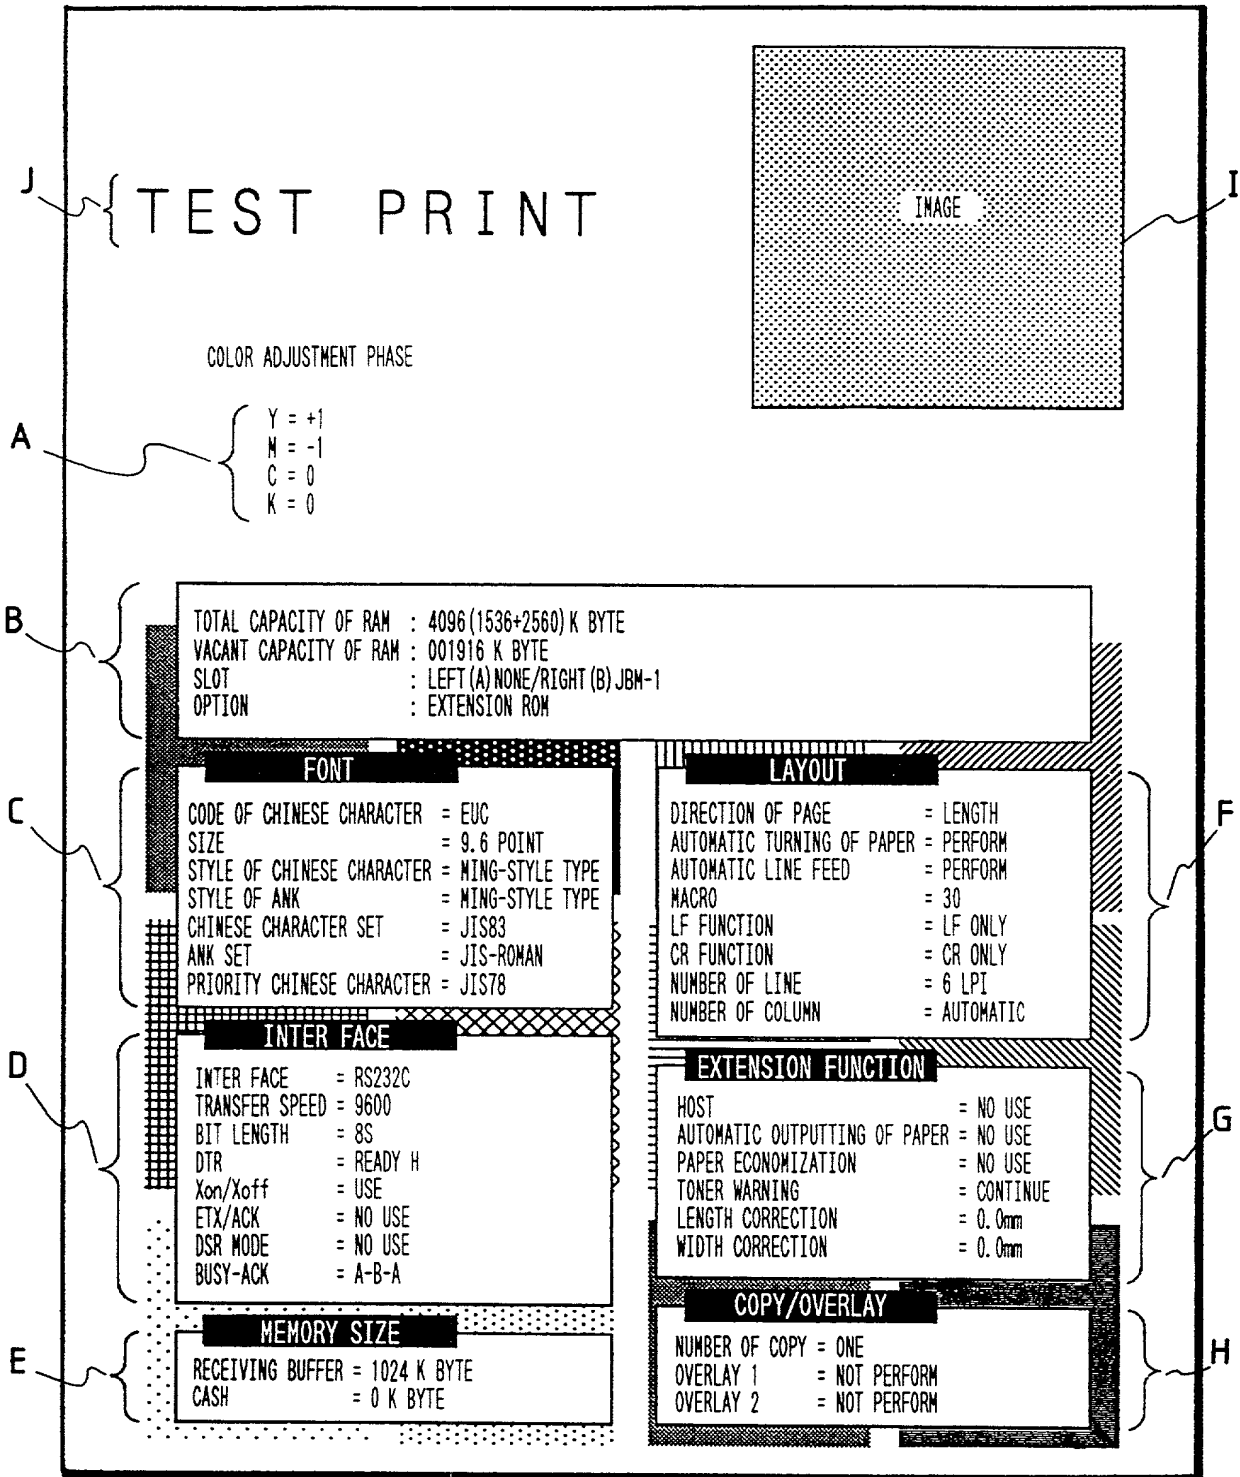




FIG. 9

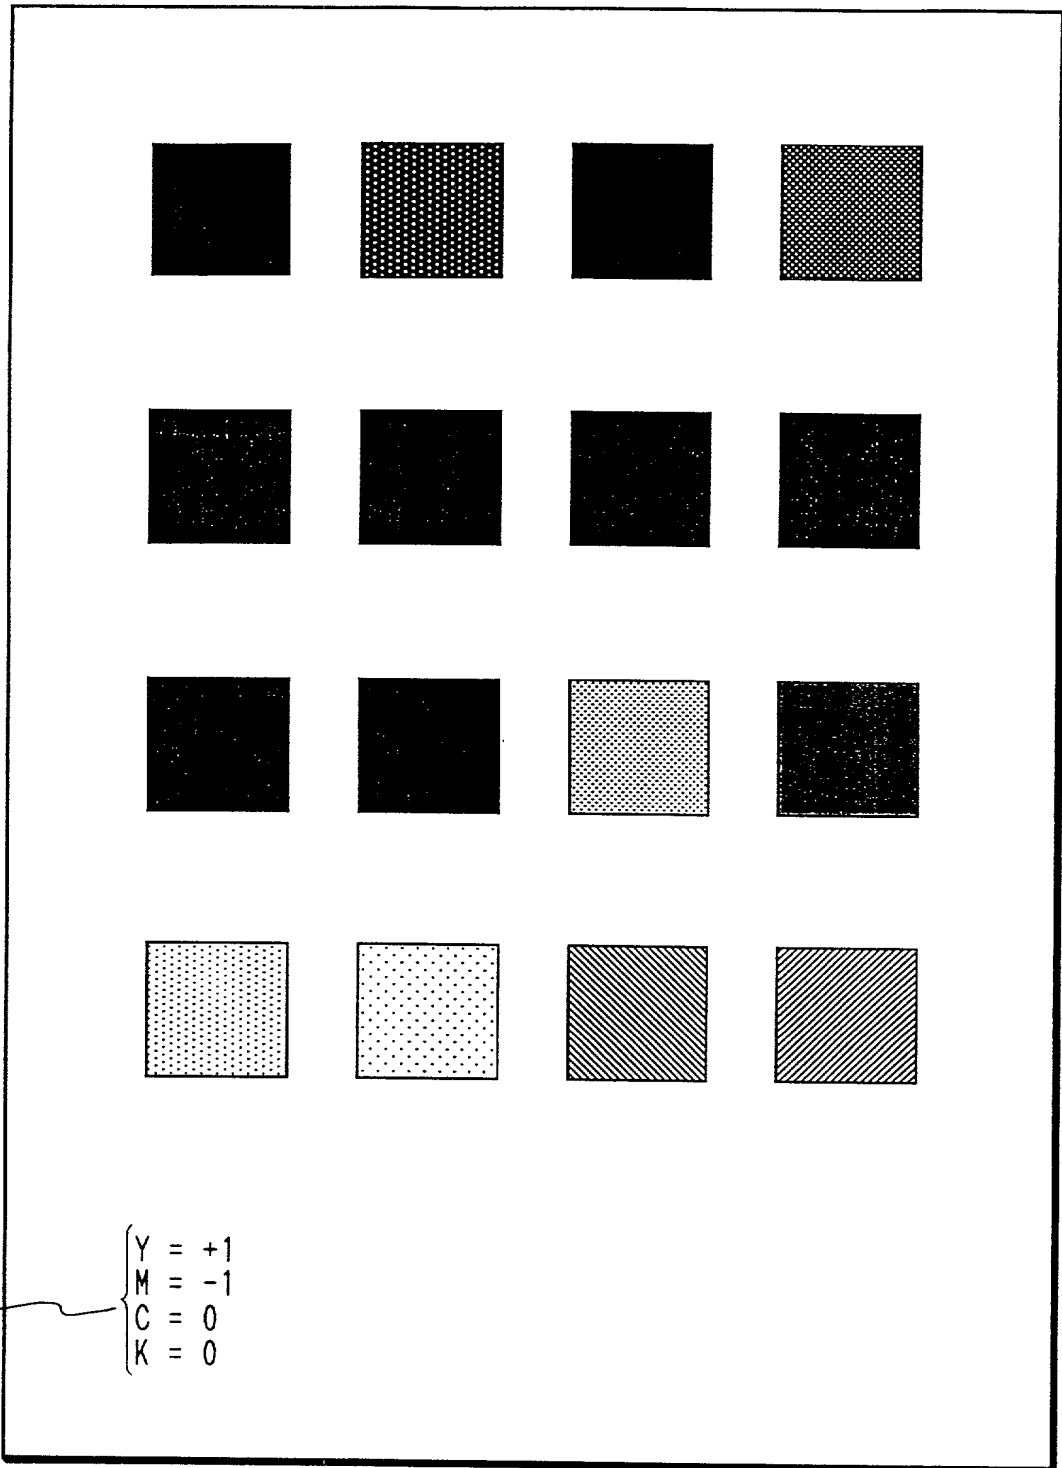

$$\begin{cases} Y = +1 \\ M = -1 \\ C = 0 \\ K = 0 \end{cases}$$

FIG. 10

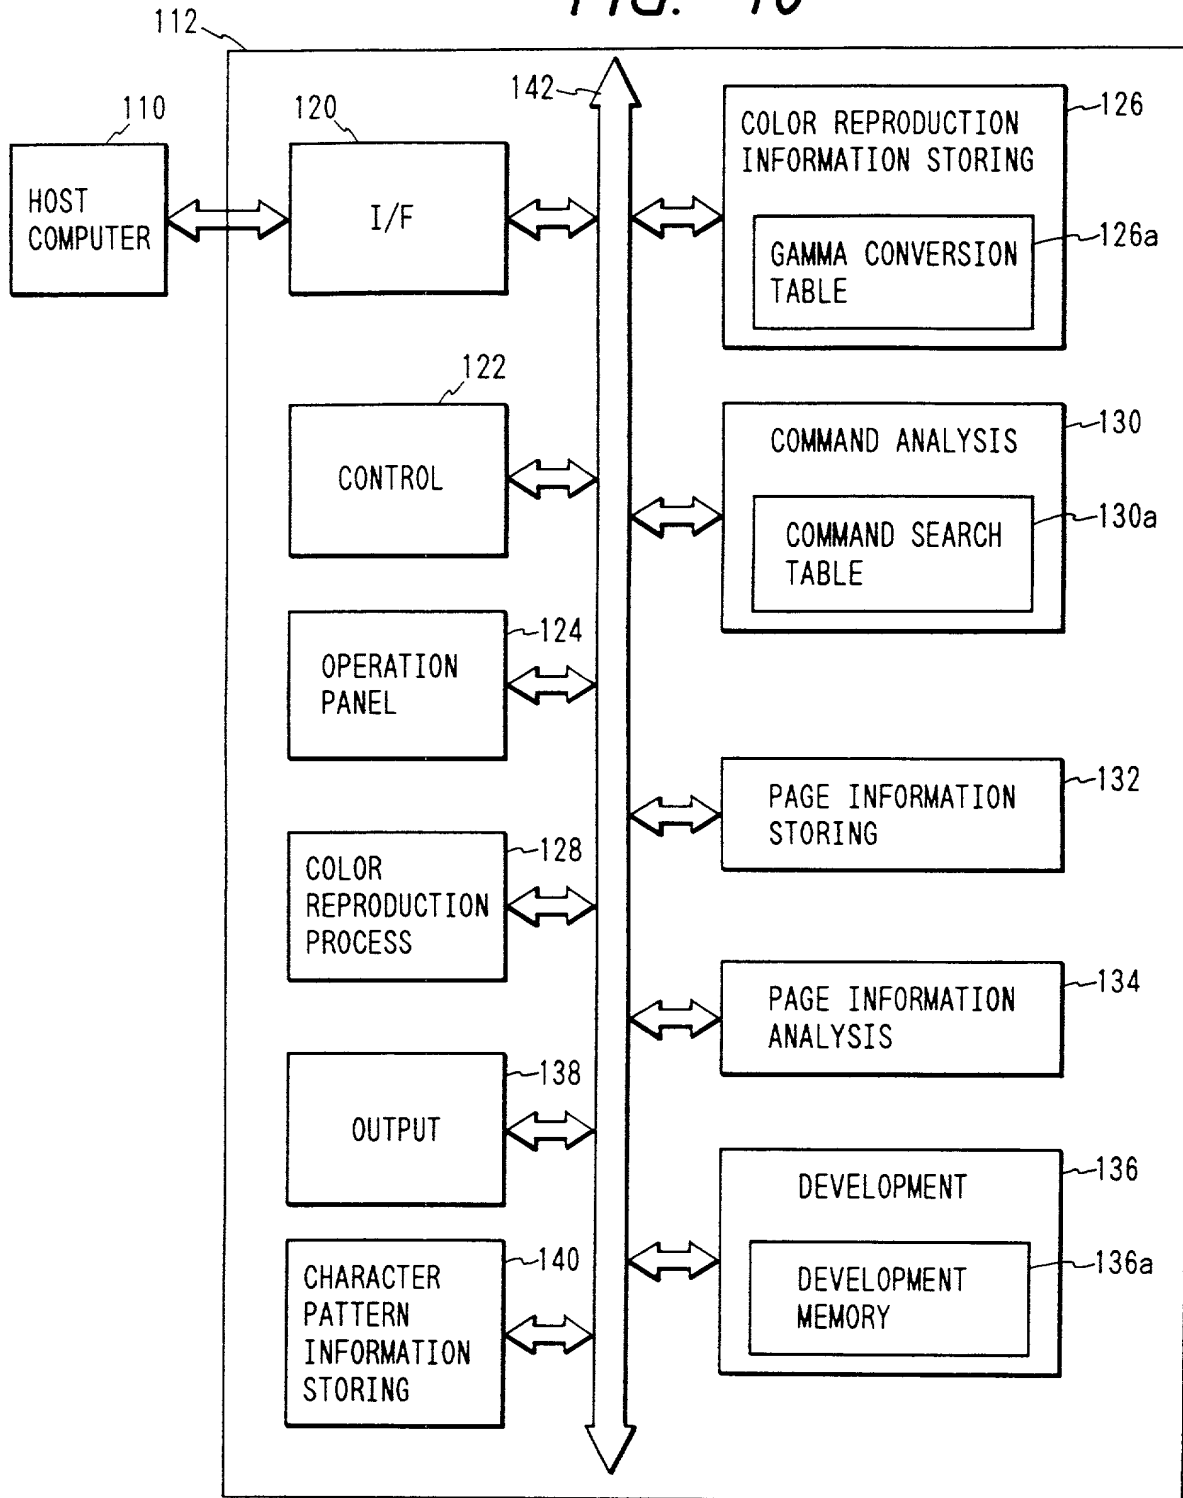


FIG. 11

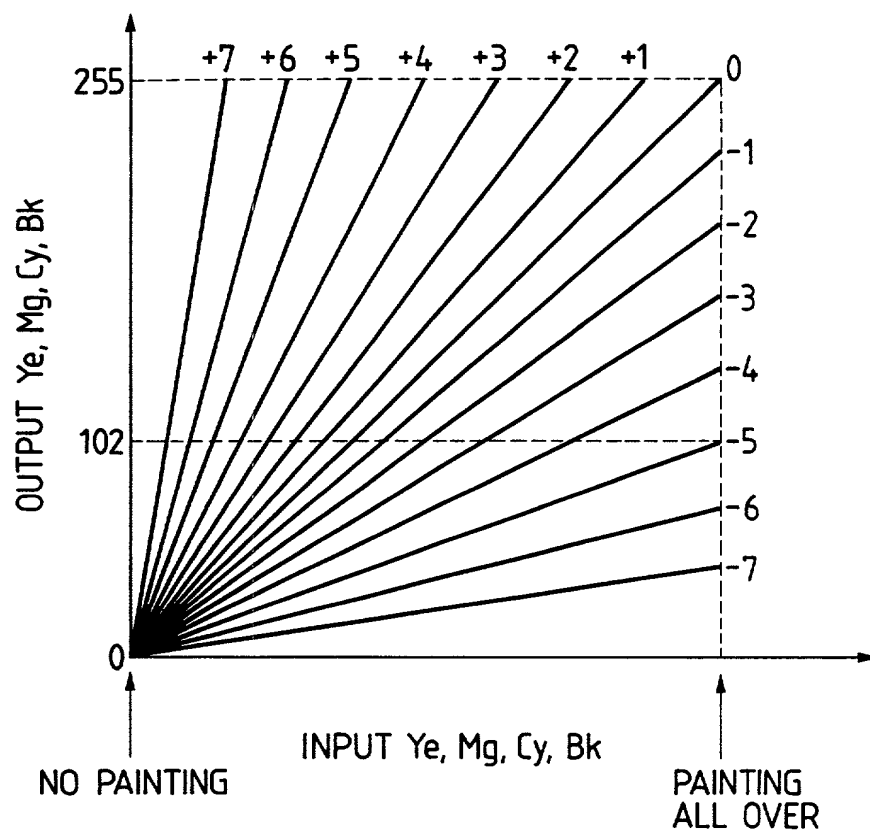


FIG. 12

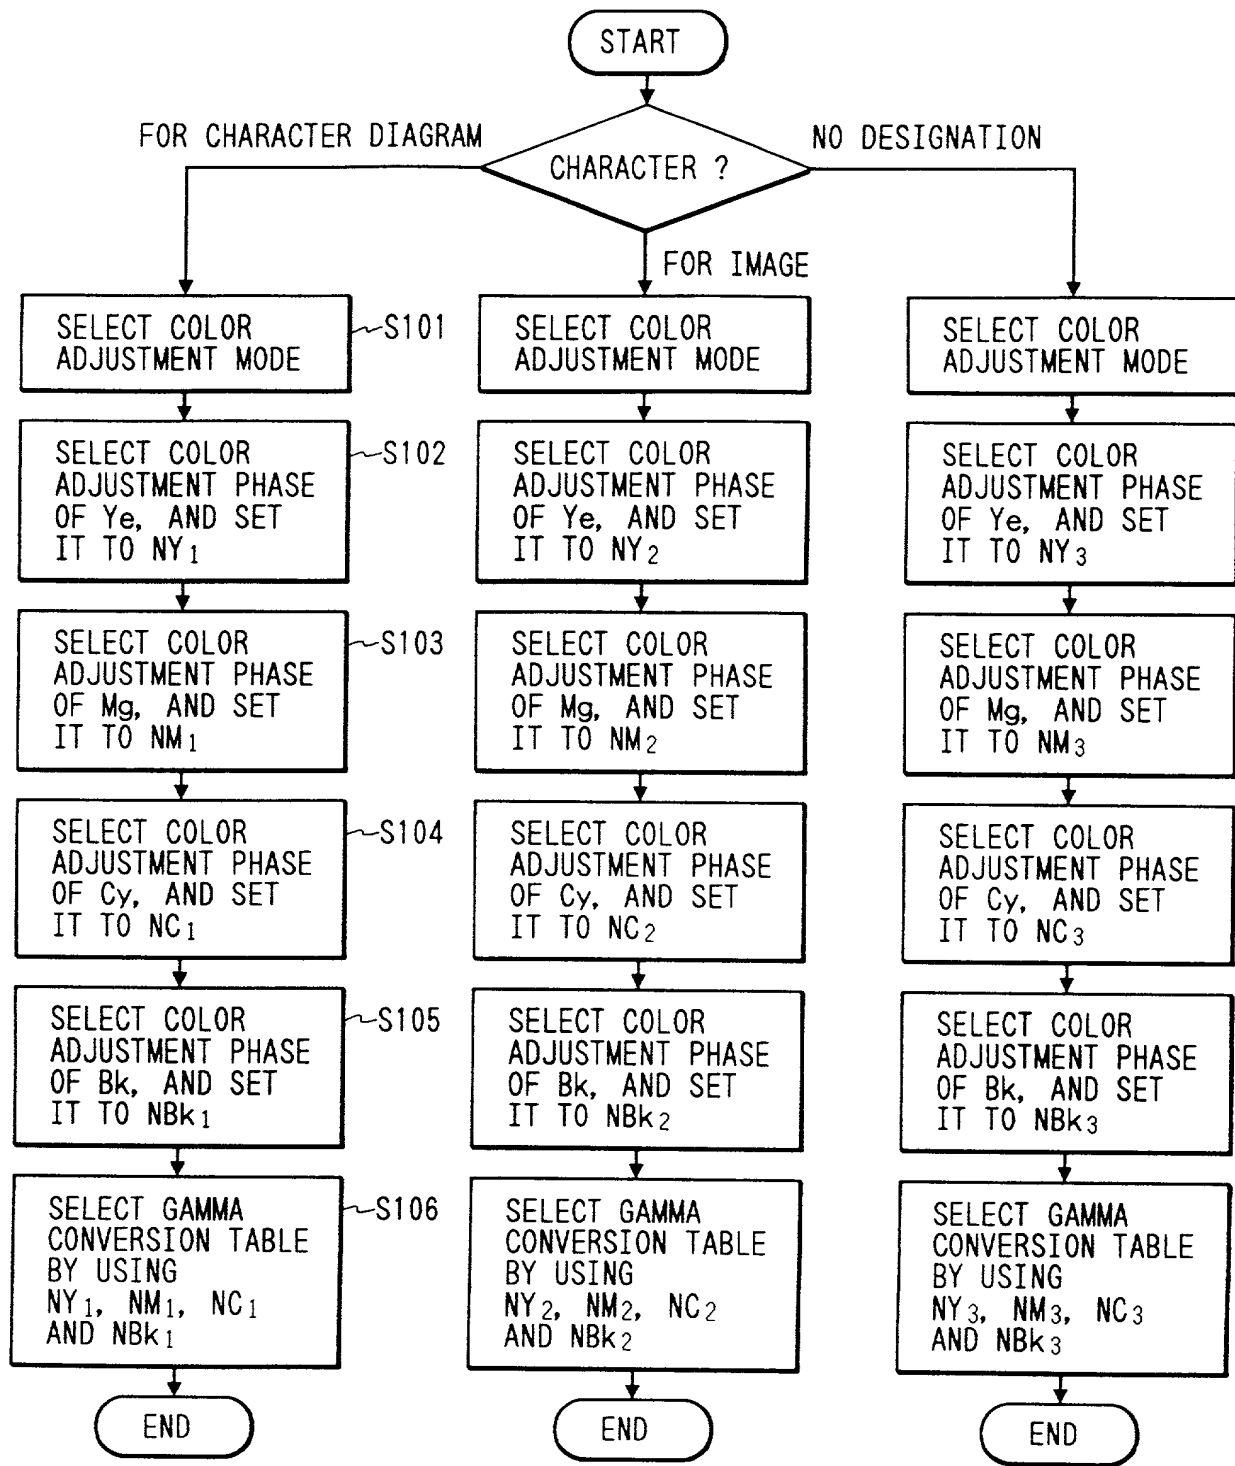


FIG. 13

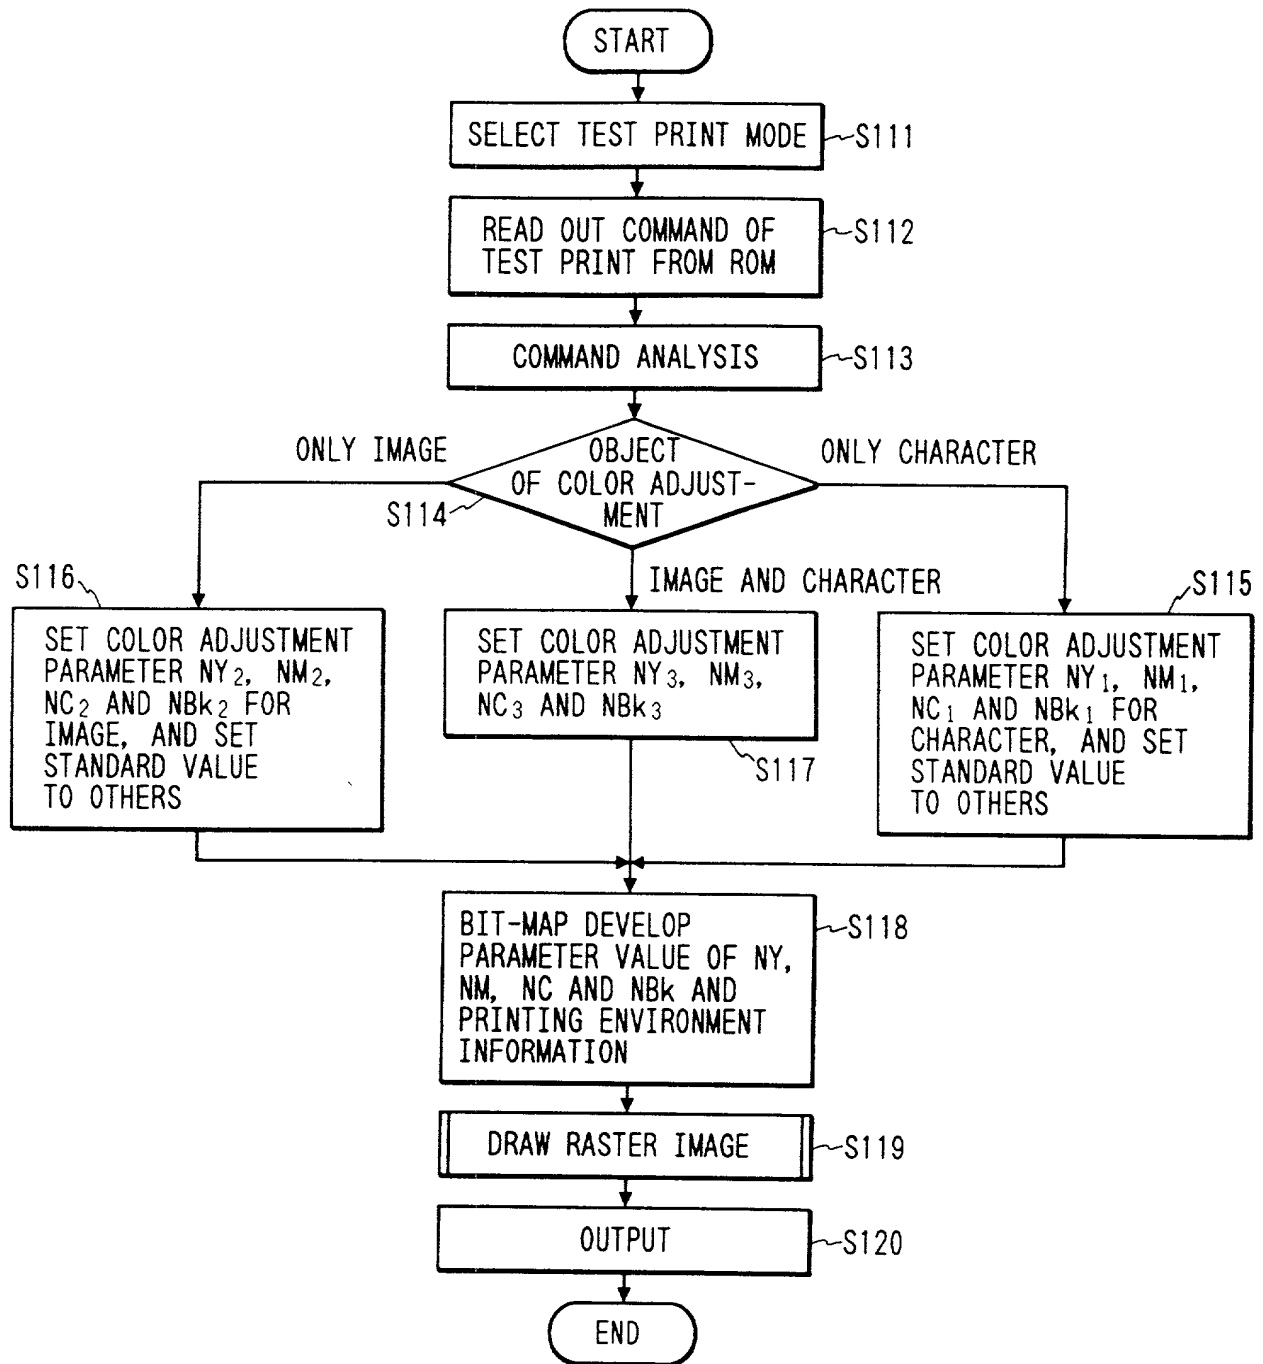


FIG. 14

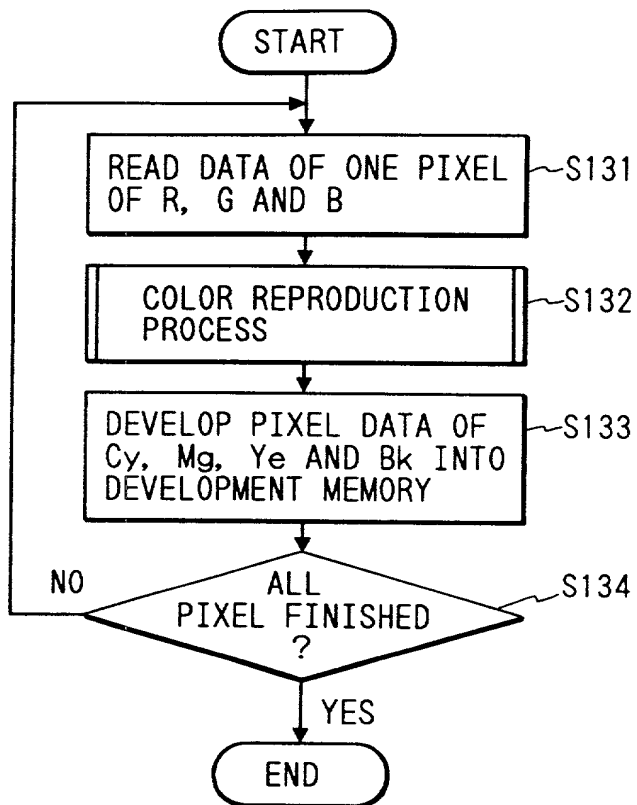


FIG. 15

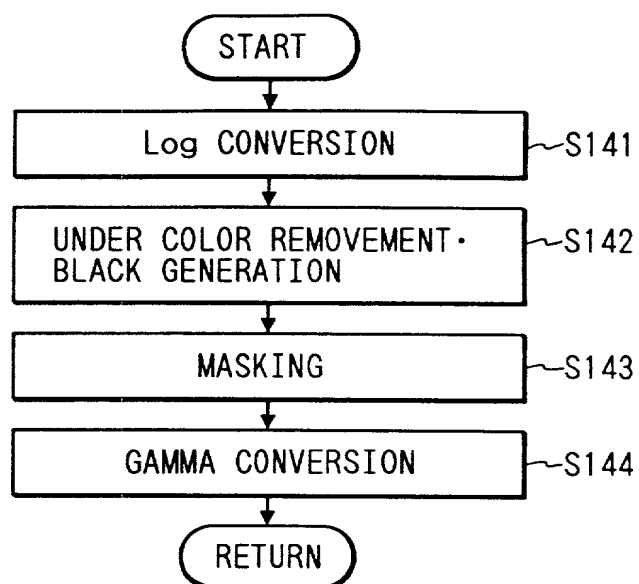


FIG. 16

# TEST PRINT


## COLOR ADJUSTMENT PHASE

(FOR CHARACTER)

A  $\begin{cases} Y = +1 \\ M = -1 \\ C = 0 \\ K = 0 \end{cases}$

(FOR IMAGE)

B  $\begin{cases} Y = +2 \\ M = -2 \\ C = -2 \\ K = 0 \end{cases}$

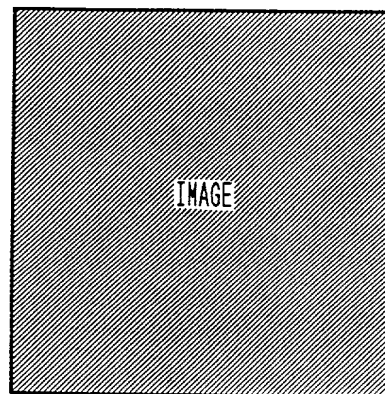

TOTAL CAPACITY OF RAM : 4096(2048+2048) K BYTE  
VACANT CAPACITY OF RAM : 002778 K BYTE  
SLOT : LEFT (A) NONE/RIGHT (B) NONE

### FONT

CODE OF CHINESE CHARACTER = JIS  
SIZE = 9.6 POINT  
STYLE OF CHINESE CHARACTER = MING-STYLE TYPE  
STYLE OF ANK = MING-STYLE TYPE  
CHINESE CHARACTER SET = JIS83  
ANK SET = JIS-ROMAN  
PRIORITY CHINESE CHARACTER = JIS78

### LAYOUT

DIRECTION OF PAGE = LENGTH  
AUTOMATIC TURNING OF PAPER = PERFORM  
AUTOMATIC LINE FEED = PERFORM  
MACRO = 30  
LF FUNCTION = LF ONLY  
CR FUNCTION = CR ONLY  
NUMBER OF LINE = 6 LPI  
NUMBER OF COLUMN = AUTOMATIC

### EXTENSION FUNCTION

HOST = NO USE  
AUTOMATIC OUTPUTTING OF PAPER = NO USE  
PAPER ECONOMIZATION = NO USE  
TONER WARNING = CONTINUE  
LENGTH CORRECTION = 0.0mm  
WIDTH CORRECTION = 0.0mm  
SUPER SMOOTH = USE

### INTER FACE

INTER FACE = RS232C  
TRANSFER SPEED = 19200  
BIT LENGTH = 8S  
DTR = H-FIXED  
Xon/Xoff = USE  
ETX/ACK = NO USE  
DSR MODE = NO USE  
BUSY-ACK = A-B-A

### COPY/OVERLAY

NUMBER OF COPY = ONE  
OVERLAY 1 = NOT PERFORM  
OVERLAY 2 = NOT PERFORM

### MEMORY SIZE

RECEIVING BUFFER = 64 K BYTE  
CASH = 0 K BYTE



FIG. 17

